



CPSURGE08USB-ANZ

# Surge Protectors

Premium Surge Protection for  
Home & Office Critical Appliances



- 

USB Charging  
Port
- 

Surge  
Protection
- 

Overload  
Protection
- 

Computer-grade  
Protection
- 

EMI and  
RFI Filtration
- 

Lifetime  
Warranty


Home and Home Office  
Small Office

CyberPower Surge Protectors safeguard your critical home and office appliances against damaging electrical surges and lightning strikes.

Designed with over-current protection and 99% copper power cord, this surge protector provides advanced protection for your valuable equipment. With two powerful USB ports supporting up to 2.4A charging current, the rapid and convenient charging for your USB-enabled devices is guaranteed.

A Limited Lifetime Warranty ensures that the surge suppressor has passed the highest quality standards in design, assembly, material or workmanship. As long as you own this product, CyberPower will cover up to entire AUD 50,000 of properly connected equipment.

- Premium Surge Protector Design
- Overload Protection
- 2 USB Charging Ports (Max 2.4A)
- EMI and RFI Filtration
- Computer-grade Protection
- Keyhole Mounting Slots
- Limited Lifetime Warranty

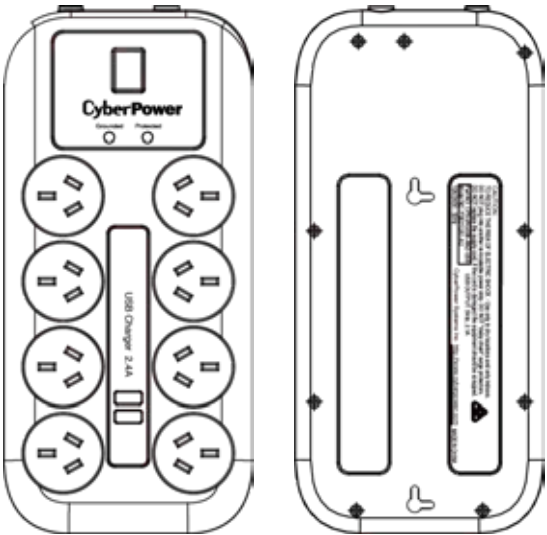

Model Name	CPSURGE08USB-ANZ
Input	
Voltage	240V
Rating	240V/10A
Switch	On/Off
Circuit Breaker	10 Amp Resettable
Power Cord	
Plug Type	AU
Plug Style	Straight
Cord Length	2.1m
Output	
Outlets - Total	8
Outlet Type	AU
USB Charging Ports	5V/2.4A
Number of USB Ports	2
Surge Protection & Filtering	
Surge Suppression	2750 Joules
Maximum Surge Voltage	6,000V
Maximum Surge Current	67,500A
Maximum Surge Current H-N	37,500A
Maximum Surge Current H-G	15,000A
Maximum Surge Current N-G	15,000A
Clamping Voltage	L-N, L-G, N-G 1200V
Response Time	< 1 nanosecond
EMI/RFI Filtration	150 kHz to 100 MHz
Attenuation	Up to 32dB
Indicators	
Indicators	Protected (Green), Grounded (Green)
Physical	
Form Factor	Strip
Color	Black
Keyhole Mounting Slots	Yes
Physical Size	
Dimensions (WxHxD) (mm.)	270 x 130 x 32
Weight	0.612
Environmental	
Operating Temperature	32 °F to 95 °F / 0 °C to 35 °C
Operating Humidity	0% - 95% non-condensing
Storage Temperature	5 °F to 113°F / -15°C to 45 °C
Maximum Operating Elevation	10,000 feet / 3,000 meters
Maximum Storage Elevation	50,000 feet / 15,000 meters
Certifications	
Certifications	RCM
RoHS	RoHS Compliant
Warranty	
Product Warranty	Limited Lifetime
Connected Equipment Guarantee	Limited Lifetime
CEG Amount	AUD 50,000

#All specifications are subject to change without notice. © 2016 Cyber Power Systems, Inc. All Trademarks are the property of their owners.

